

TECHNICAL DATA SHEET

Range: Simple tap for shower
Ref: 31160 - In duct shower kit



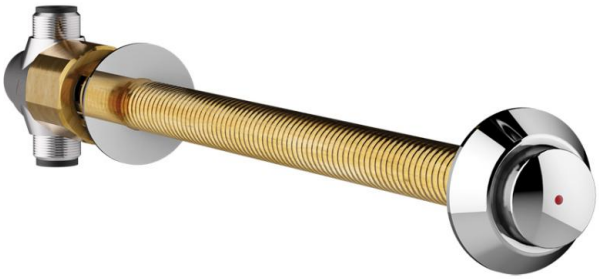

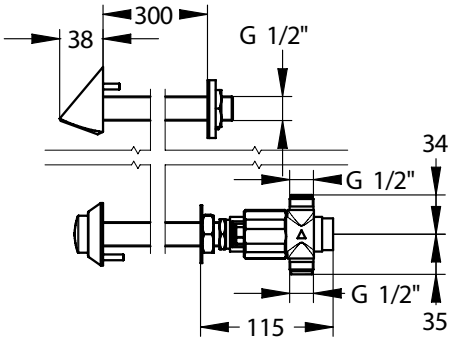

> Working pressure :
- 1 to 5 bar

> Flow :
- 6 l/min at 3 bar with flow limiter
- Flow rate control through a ring nut
- Anti-water-hammering design

> Flow time :
- 30 seconds (± 5 sec.)

> Hydraulic supply :
- M G 1/2" - Cold or premixed water

> Thermal resistance :
- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Delivered with :
- 1 Cross-partition control (15 to 300 mm thick)
- Shower tap PRESTO 500S NF/II
- 1 Flat gasket
- 1 Filter gasket
- 2 Union nuts 1/2" for 14x16 mm tube

> Standards & approvals :
- Brass body in accordance with EN 1982, EN 12164, EN 12165
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

6 l/min | 1/2" | 20-35 sec | 75°C

PRESTO (LES ROBINETS) : Siège Social: 7 rue Racine 92542 Montrouge Cedex - Site de Production: 4 rue Lavoisier 17110 St-Georges de Didonne - Tel: 01.46.12.34.56 - Fax: 01.40.92.00.12 - www.presto.fr